
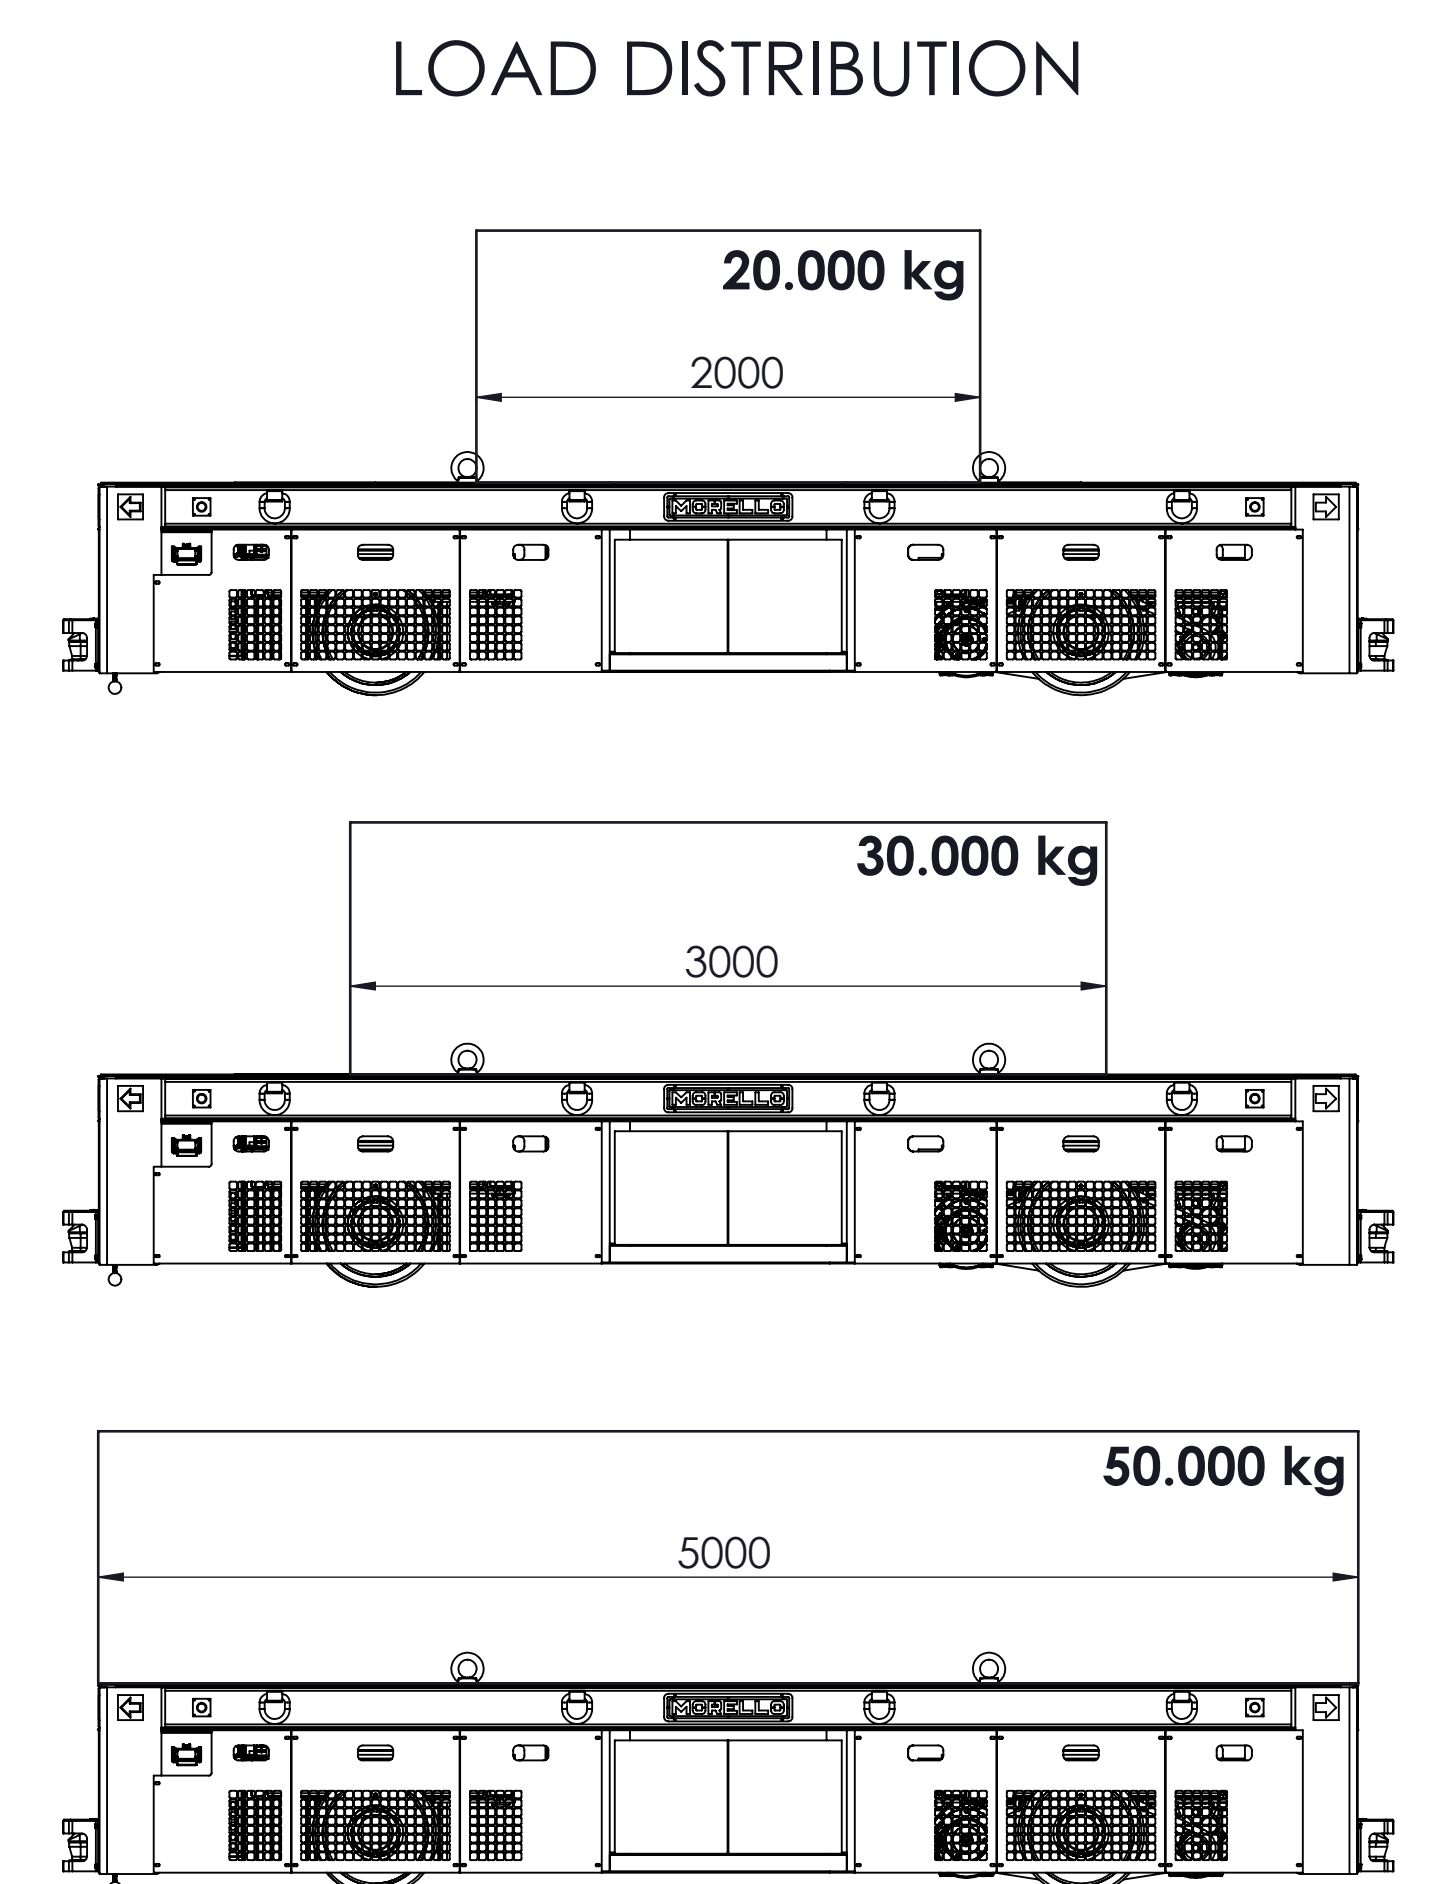
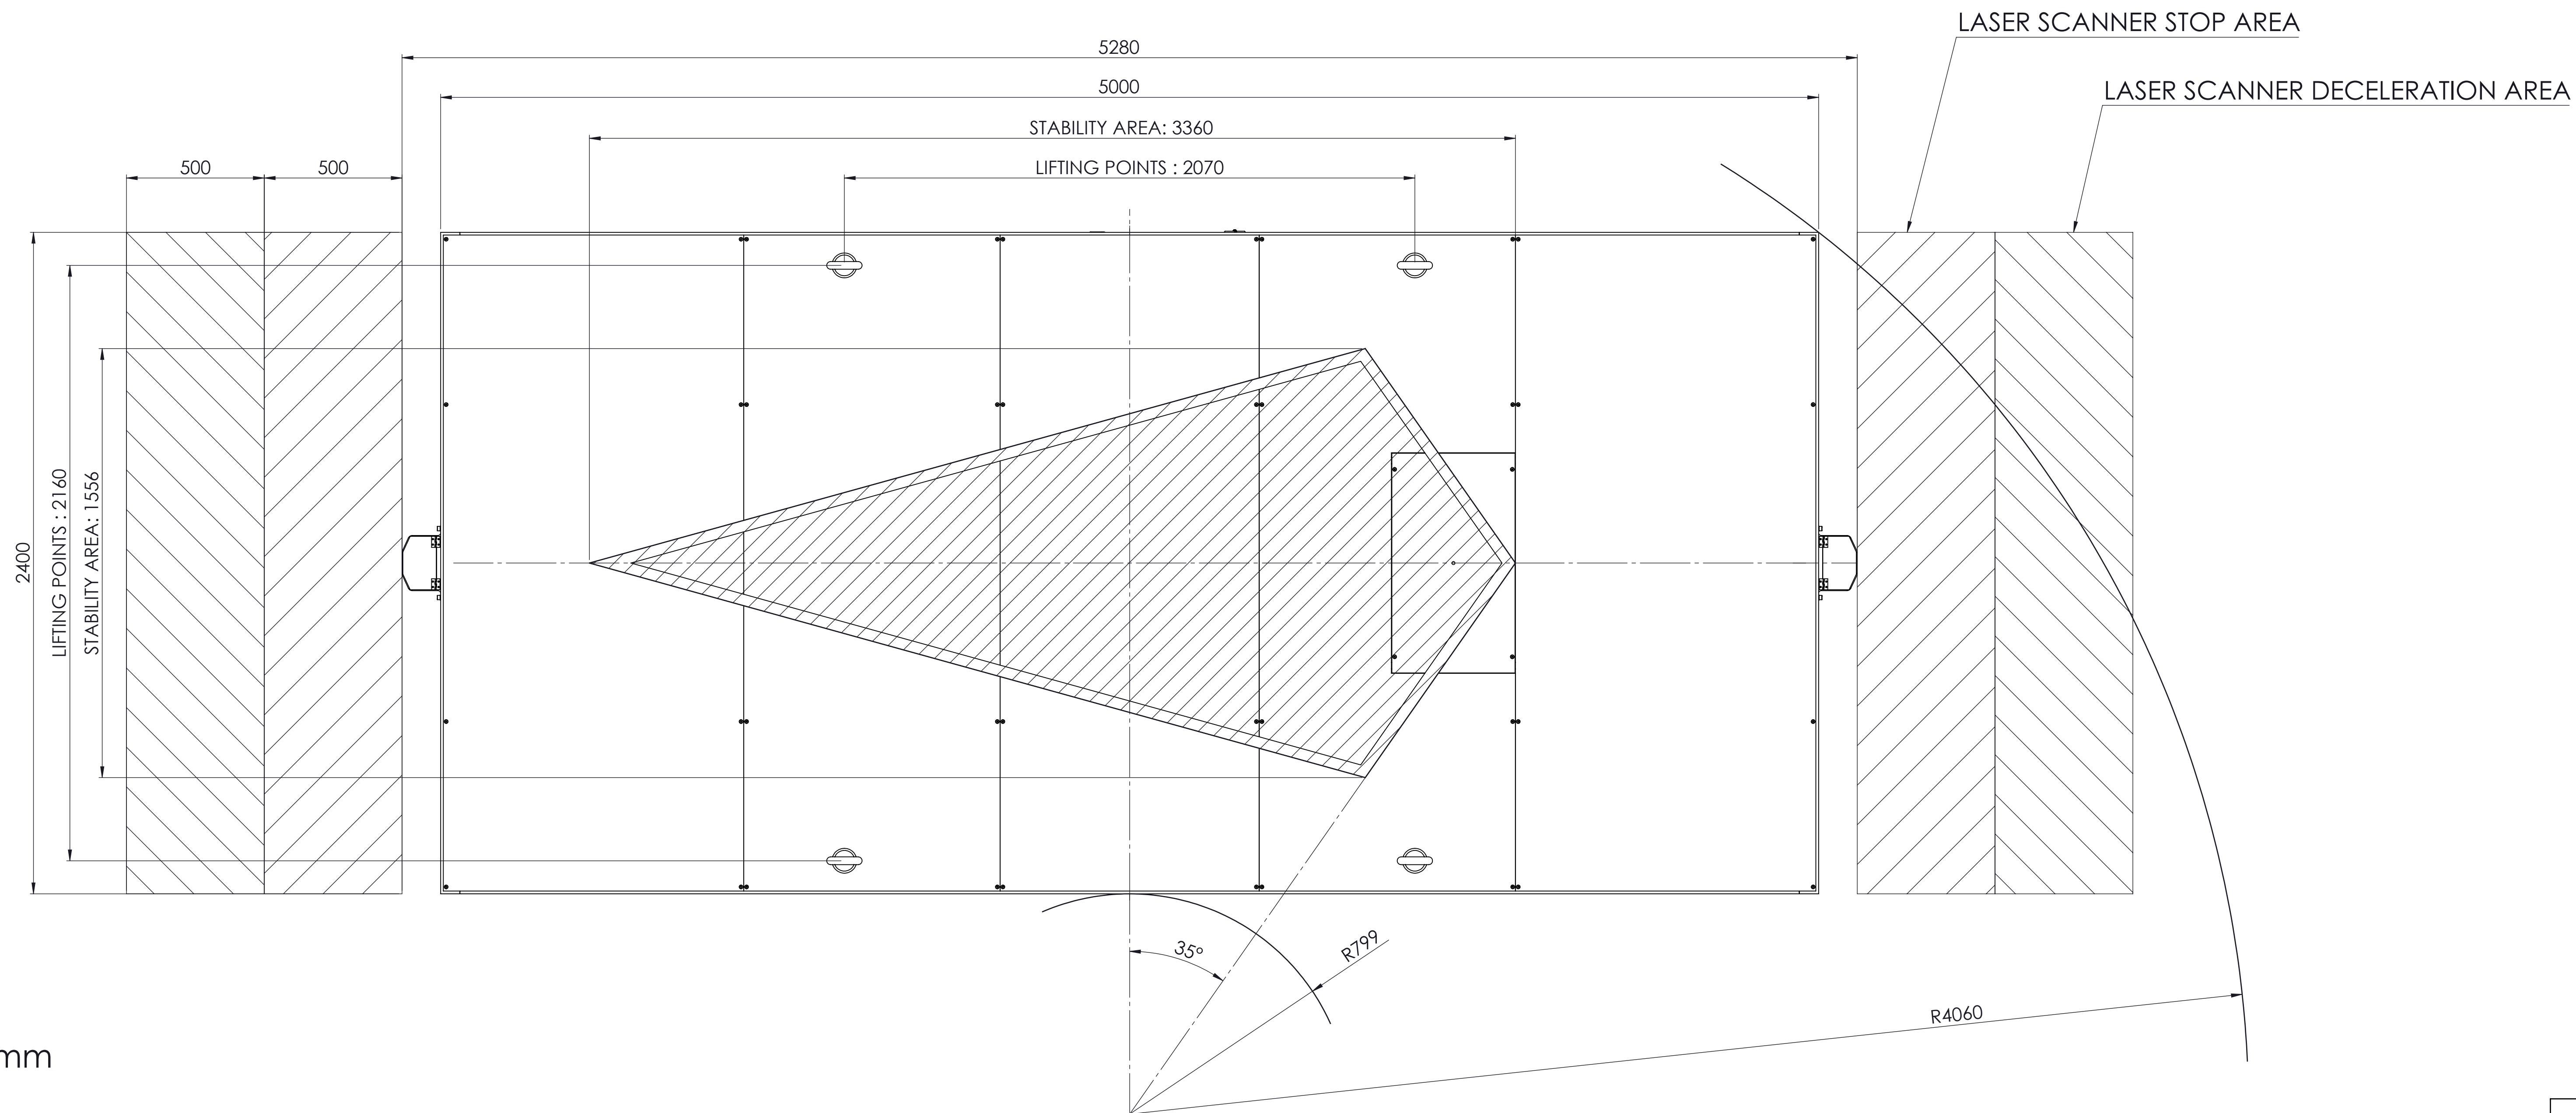


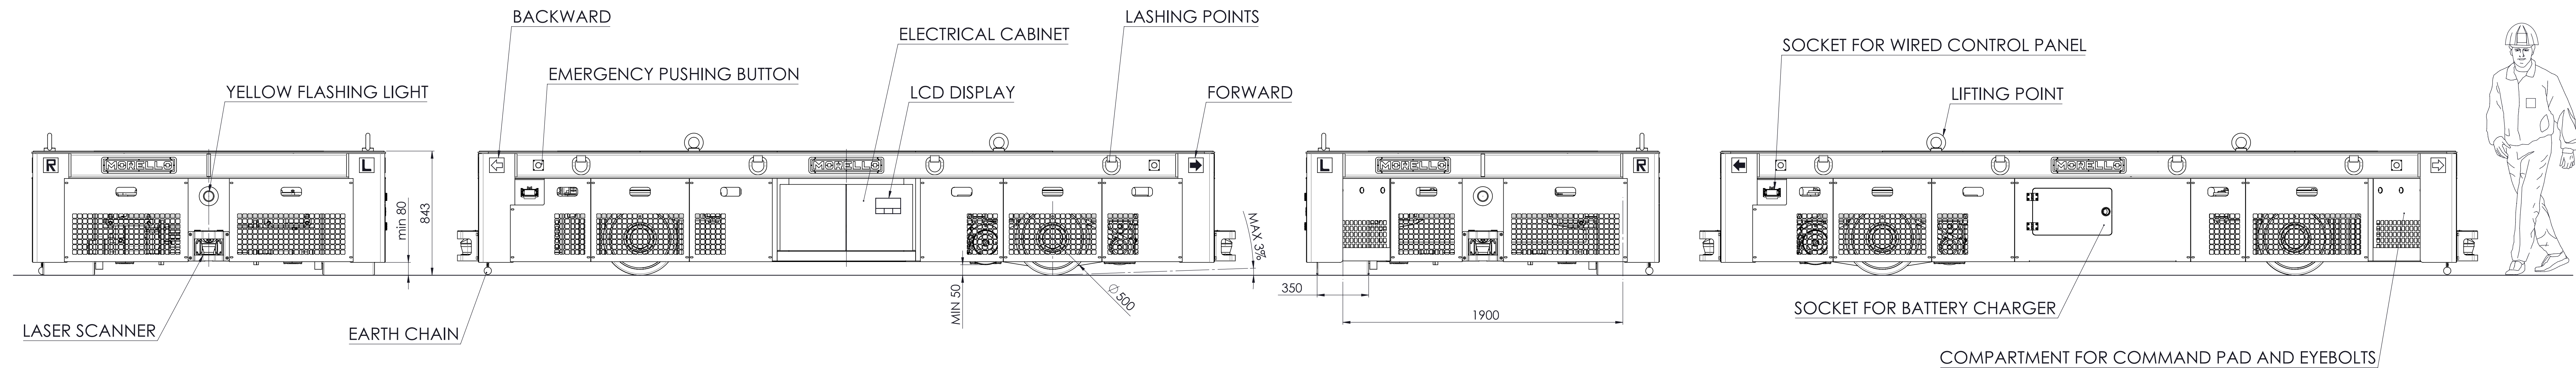

CHARACTERISTICS

- LOADING DECK DIMENSION: 5000x2400mm
- LOADING DECK HEIGHT: ~840mm
- LOADING DECK MATERIAL: CHEQUERED STEEL SPLATE TH. 6mm
- PAYLOAD: 50.000kg
- MAXIMUM SPEED ON 0% SLOPE: 30m/min
- MAXIMUM SUPERABLE SLOPE: 3%
- DEAD LOAD: 5.500kg
- PAINTING: YELLOW RAL1018 AND GRAY RAL7016

MAIN MECHANICAL COMPONENTS

- N. 4 POLYURETHANE WHEELS Ø500x350mm
- N. 2 TRACTION MOTORS AC 80V 8.000W 2.200rpm
- N. 8 LASHING POINTS
- N. 4 LIFTING POINTS TO HANDLE THE TRAILER BY CRANE



SAFETY DEVICES

- N. 4 EMERGENCY BUTTONS
- N. 2 SAFETY LASER SCANNER
- N. 2 YELLOW FLASHING LIGHT
- N. 1 ACOUSTIC SIGNAL SIGNALLING "TRAILER OPERATING"

MAIN ELECTRICAL COMPONENTS

- N. 1 LITHIUM BATTERY 80V 220Ah
- N. 1 BATTERY CHARGER:
 - POWER SUPPLY 480V 60Hz 3P+E
 - SOCKET: GEWISS GW60019H 3P+E, 32A
- N. 1 WIRELESS POTENTIOMETRIC REMOTE CONTROLLER
- N. 1 WIRED CONTROL PENDANT PANEL

CHEQUERED PLATE

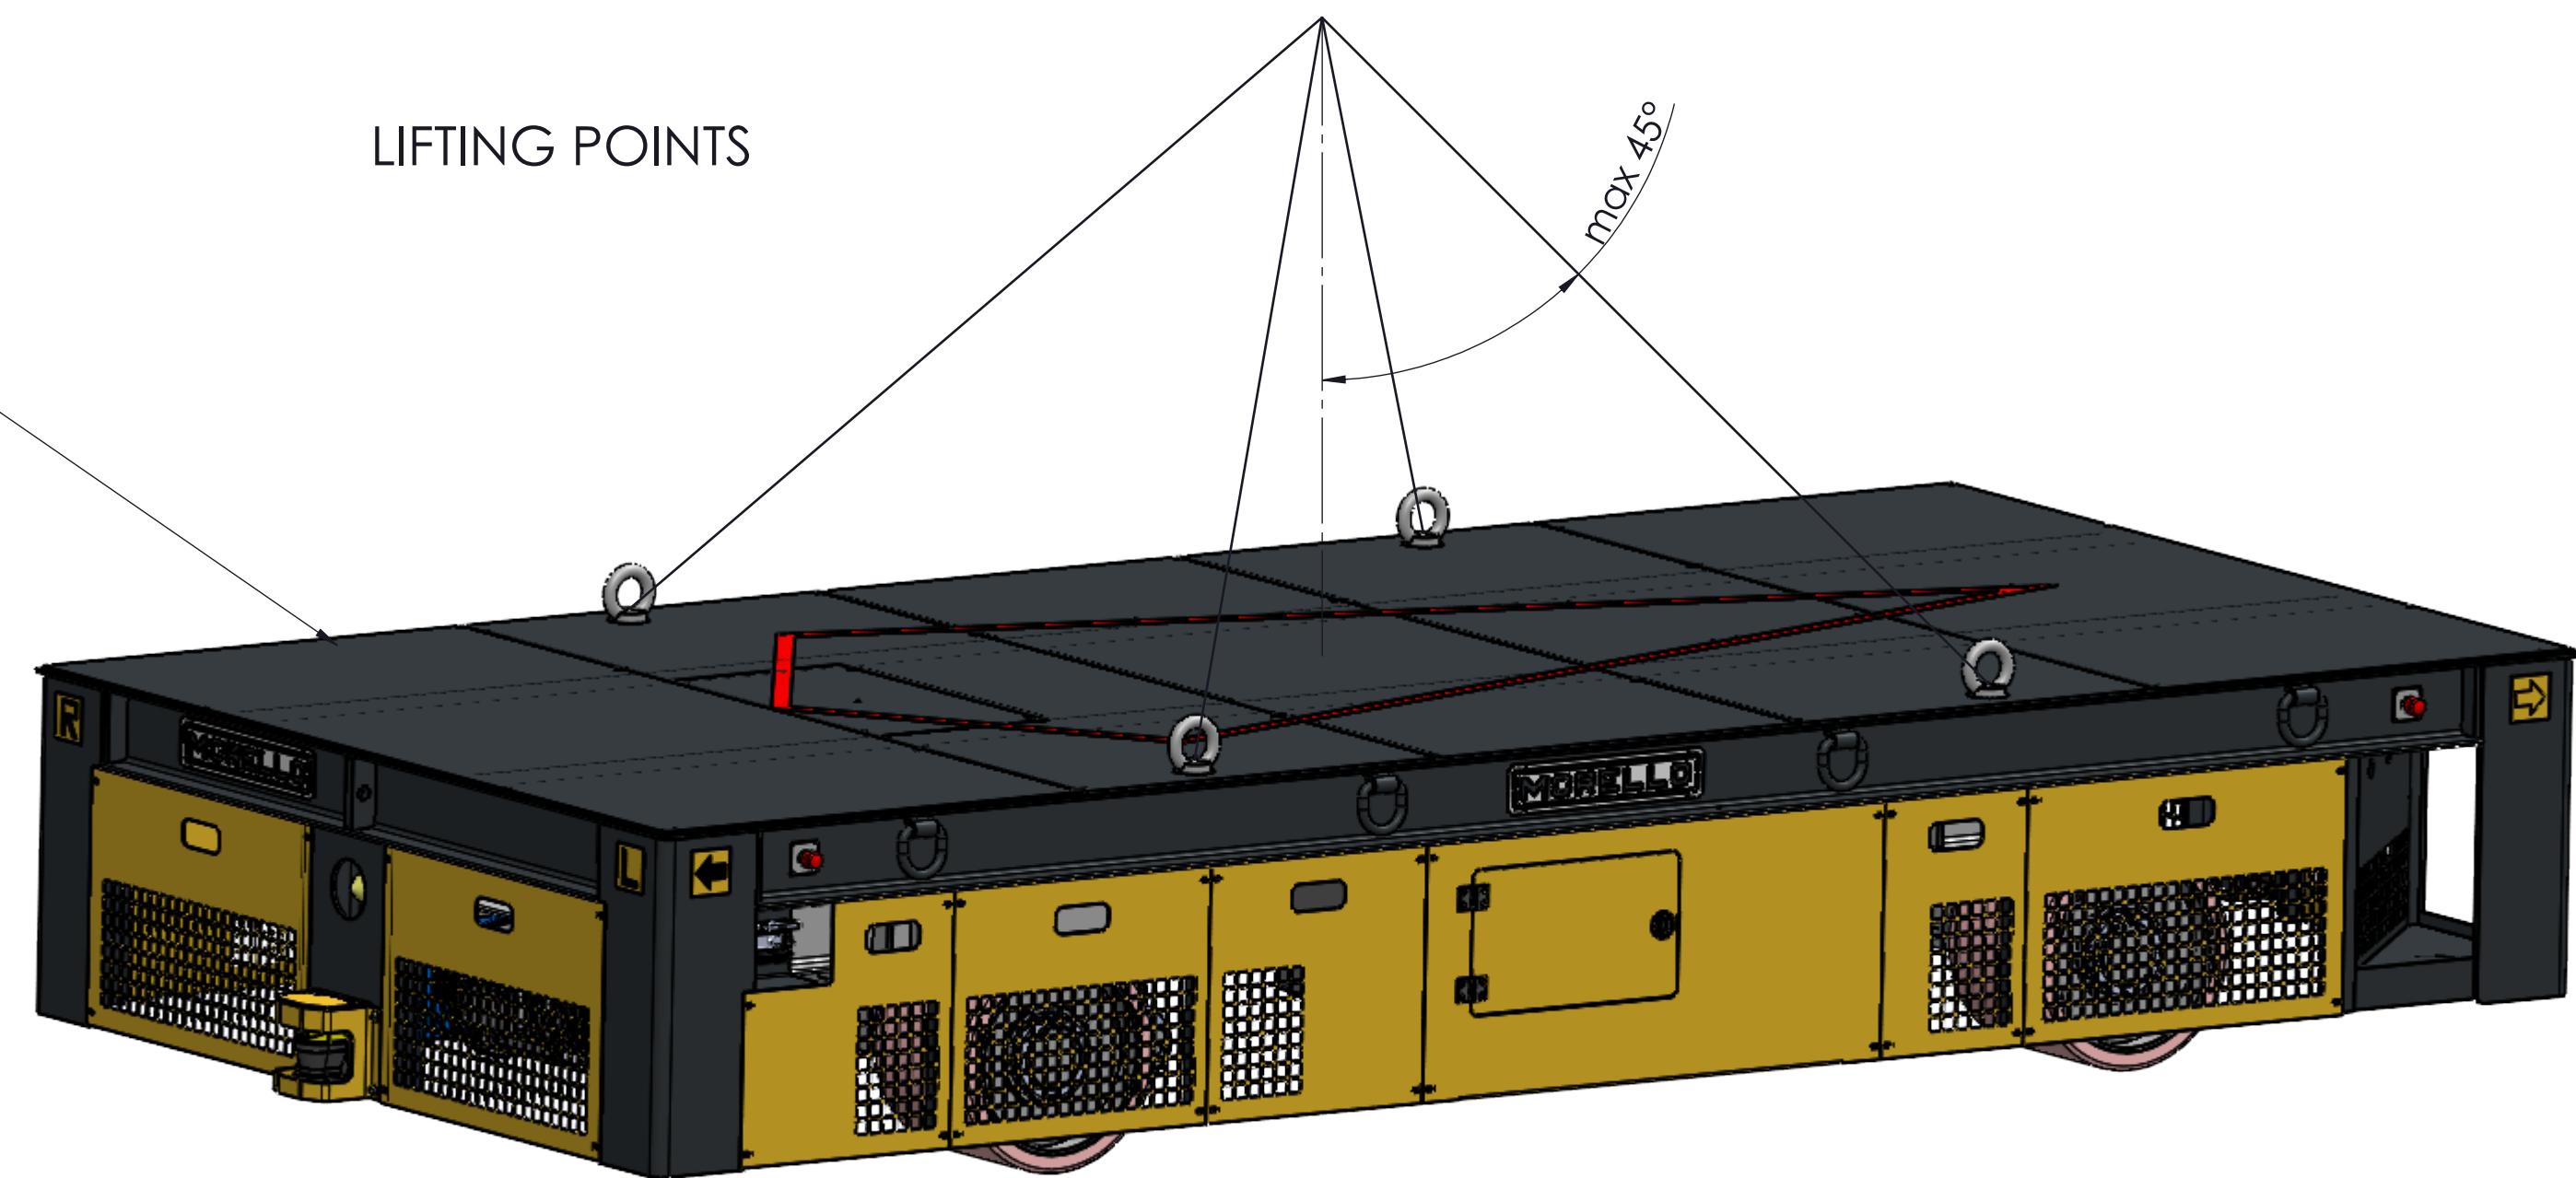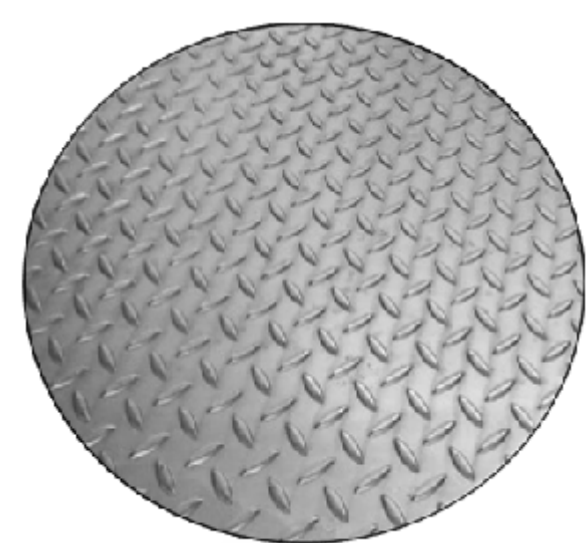

STANDARD EYE-BOLTS SUPPLIED WITH THE TROLLEY, FOR A CORRECT LIFTING WITH CHAINS INCLINATED, NEED TO BE ORIENTED IN DIRECTION TO THE RING. TO CORRECT ORIENT THE EYE-BOLTS INSERT THE RELATIVE WASHER.

The dimensions in this drawing are indicative and may vary

MORELLO

INNER TRANSPORTATION TECHNOLOGY

Lgo Dora Colletta 85/A
10153 Torino (Italy)
Tel. 011/2480569 - Fax 850085

e-mail: info@morellogiovanni.it
<http://www.morellogiovanni.it>

PROJECT:

SGAE VC P 50/2

PAYLOAD: 50 t evenly distributed
PORTATA: 50 t uniformemente distribuita

DESCRIPTION:

GENERAL ASSEMBLY DRAWING

DESIGNER	ORDER	ORDER REFERENCE
D Semilla	2555C3	
DATE	04/11/2025	
SCALE	1:15	
	2555C3_A0A_AA000	
	ITEM NUMBER	