

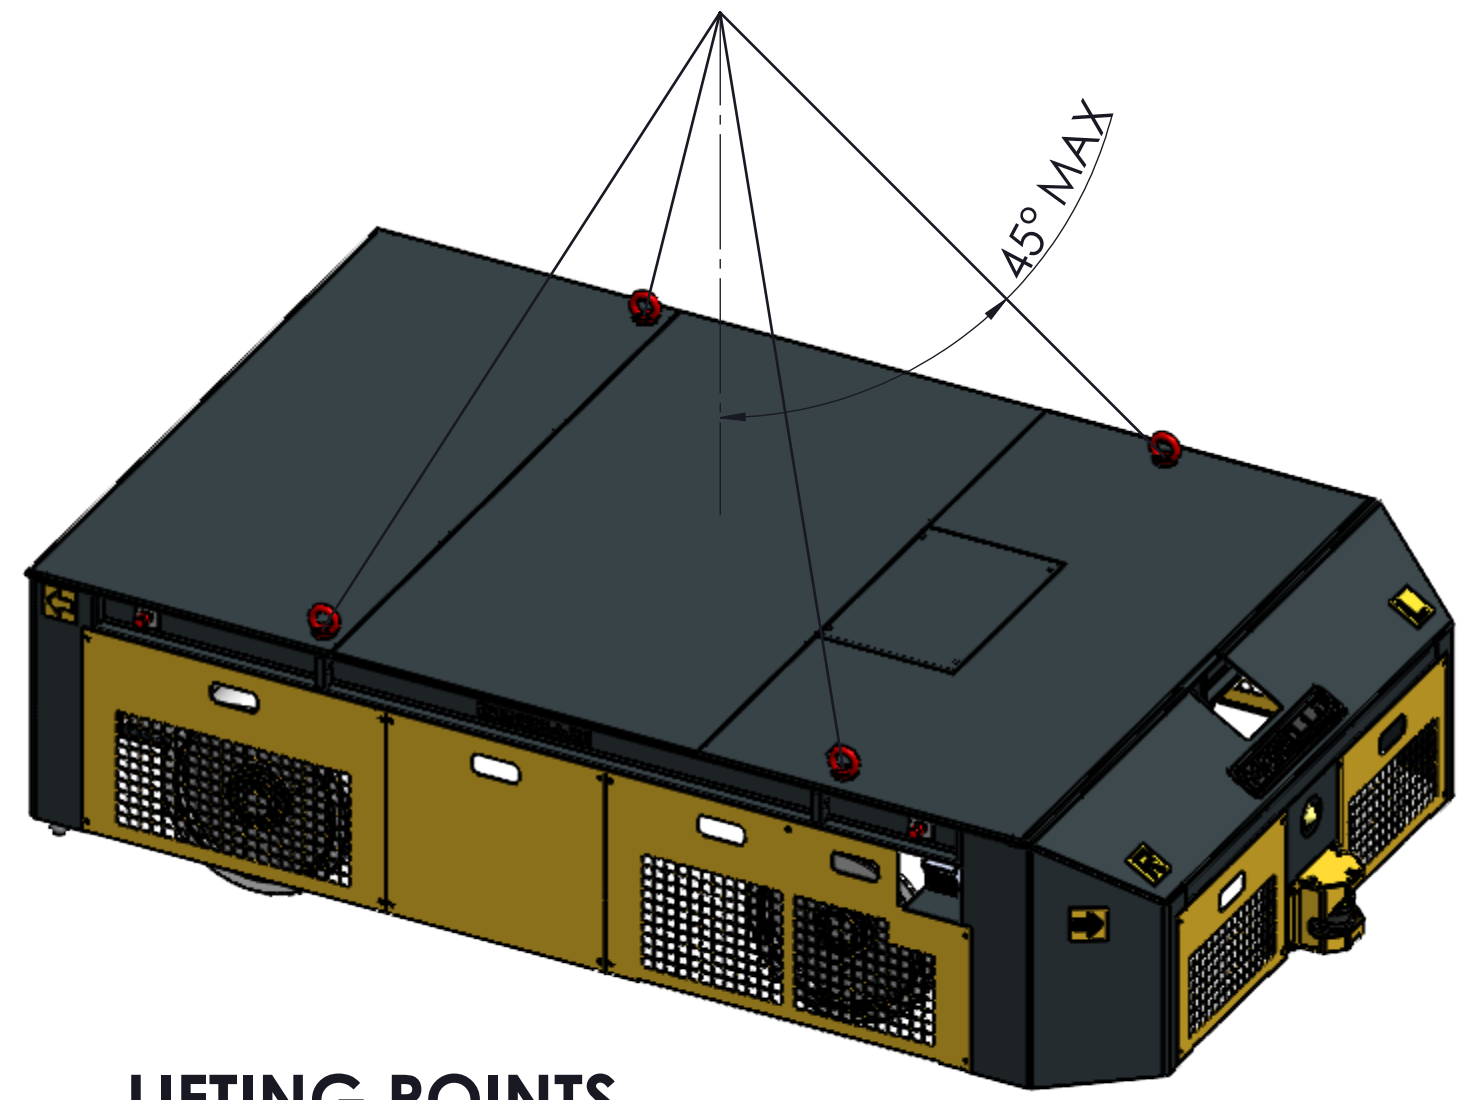


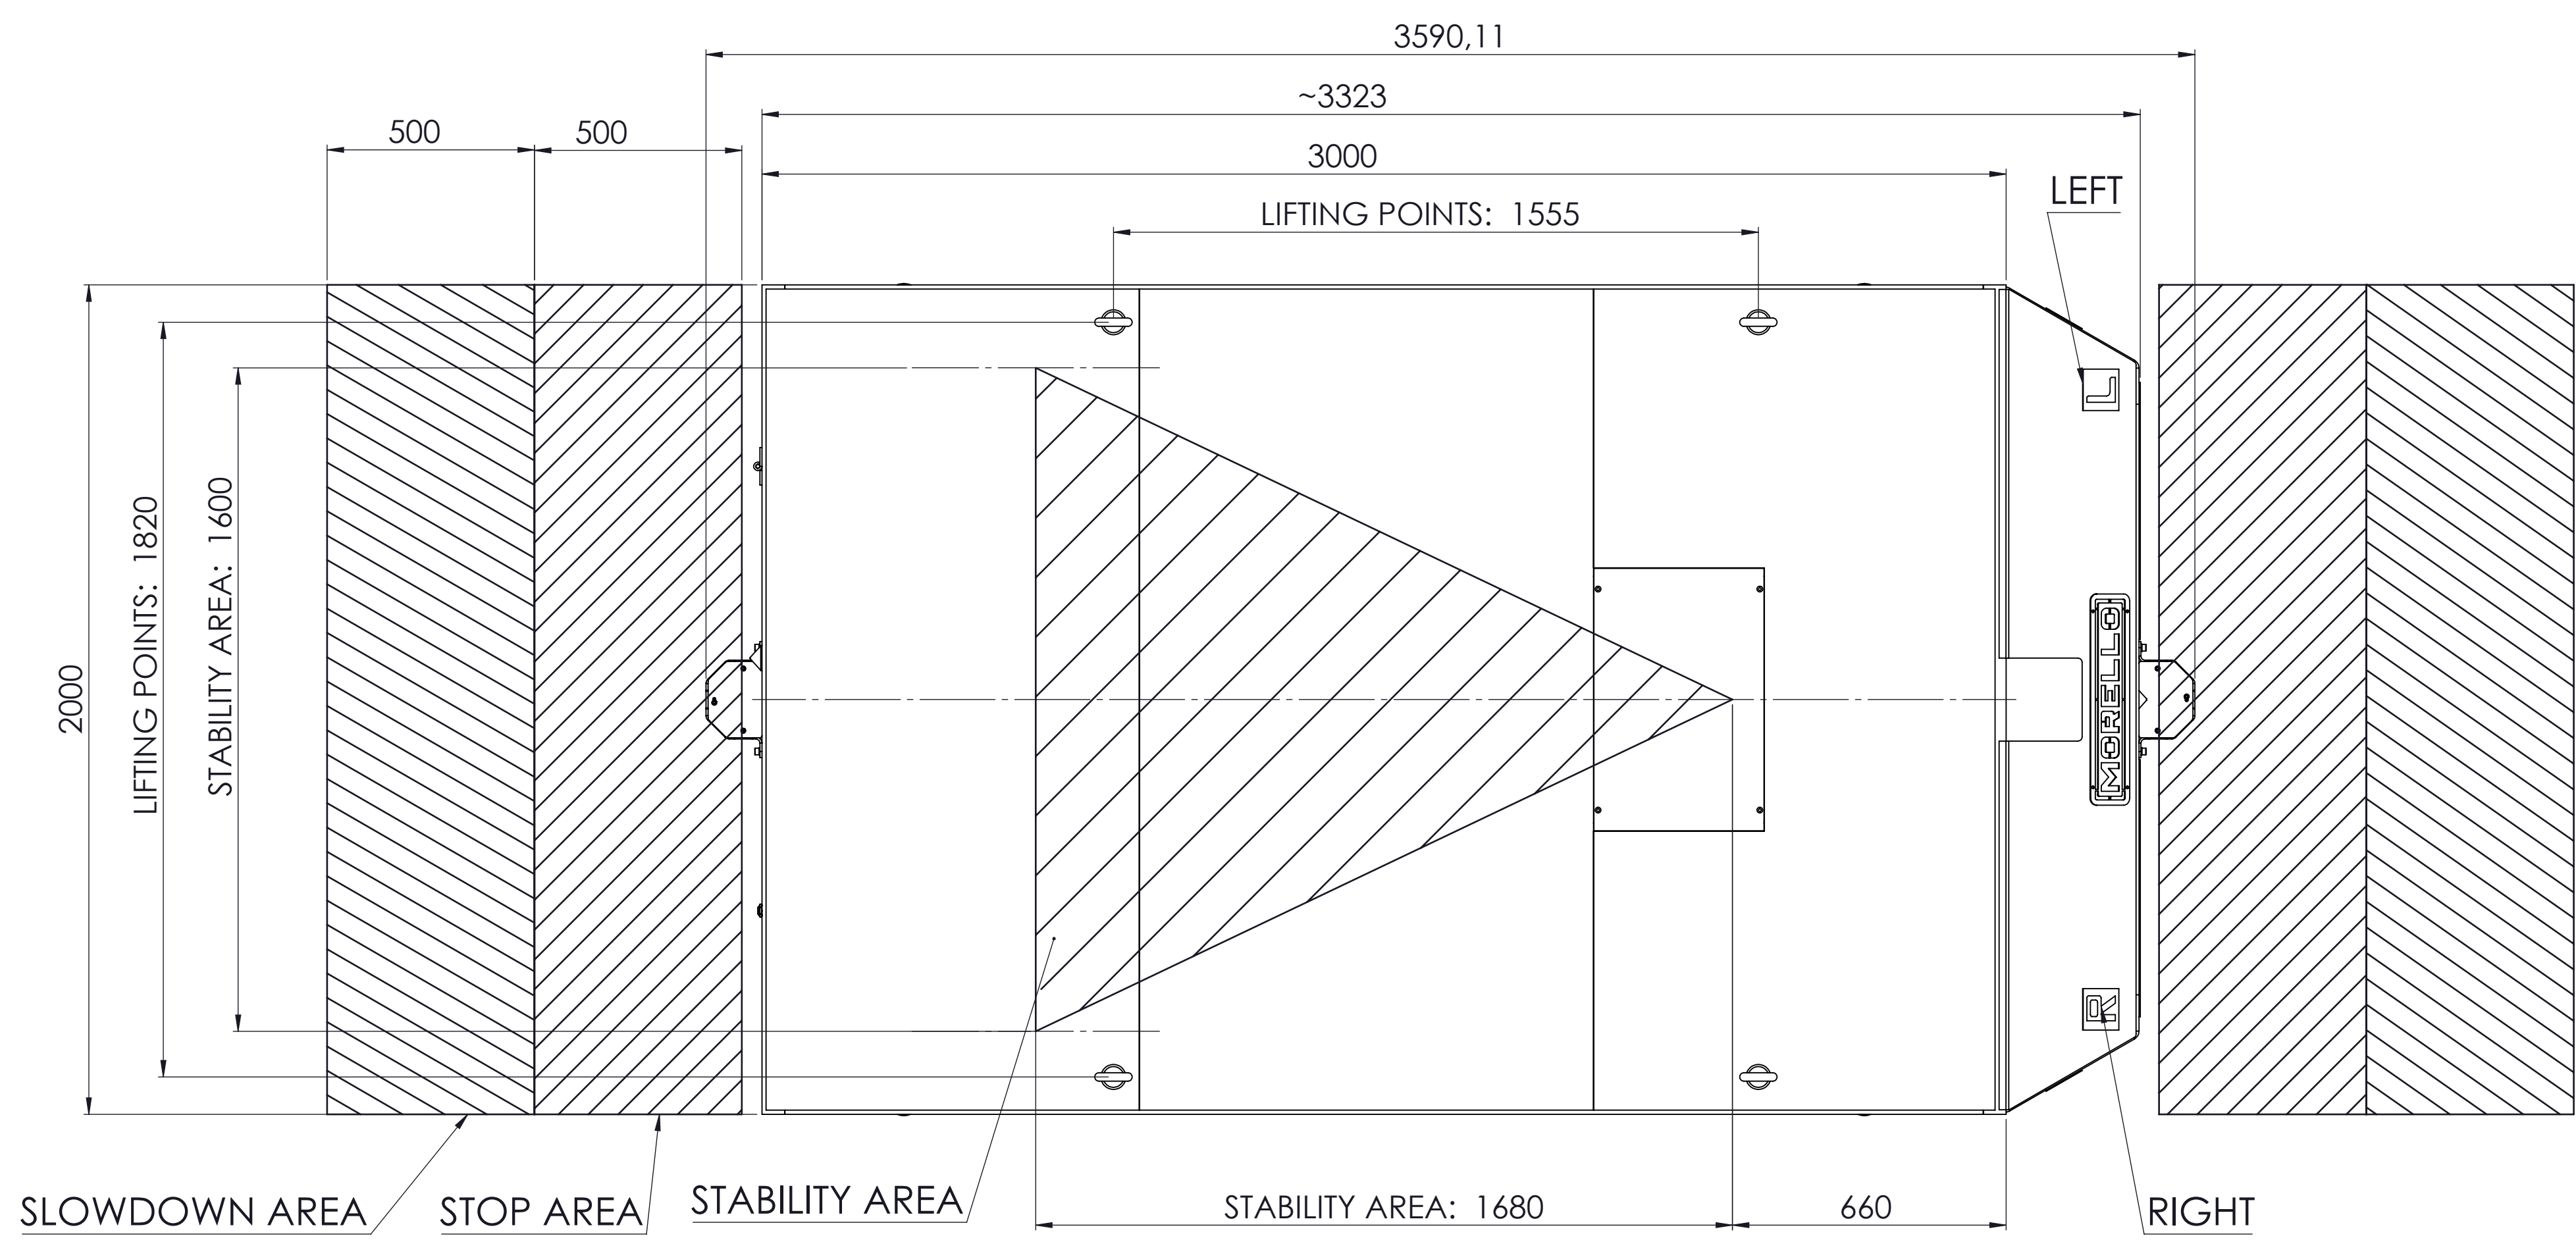

LIFTING POINTS

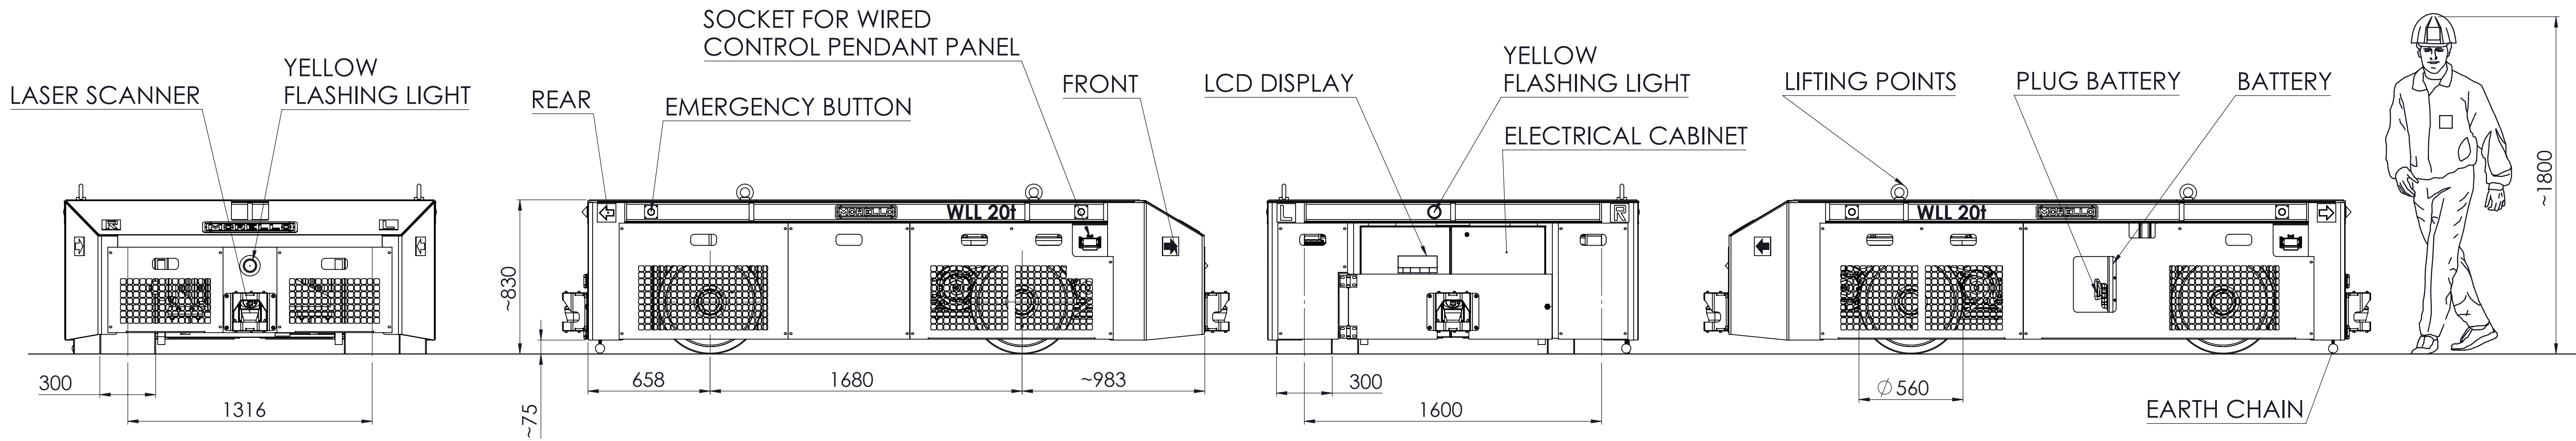

STANDARD EYE-BOLTS SUPPLIED WITH THE TROLLEY, FOR A CORRECT LIFTING WITH CHAINS INCLINATED, NEED TO BE ORIENTED IN DIRECTION TO THE RING. TO CORRECT ORIENT THE EYE-BOLTS INSERT THE RELATIVE WASHER.

- CHARACTERISTICS:**
- N. 4 WHEELS Ø560x300mm NO MARKING
 - N. 2 TRACTION MOTORS 48V 3.000kW 2.200rpm
 - N. 4 AMOVABLE M24 LIFTING POINTS TO HANDLE THE TRAILER BY CRANE
 - N. 1 LITIUM BATTERY 48V 148Ah
 - N. 1 BATTERY CHARGER:
 - SUPPLY VOLTAGE: 460V 60Hz 3ph
 - PLUG: GW60745H (32A 3P+N+PE)
 - N. 1 WIRED CONTROL PENDANT PANEL
 - N. 4 EMERGENCY PUSH BUTTONS
 - N. 2 YELLOW FLASHING LIGHT
 - N. 2 LASER SCANNERS
 - ACOUSTIC SIGNAL SIGNALLING "TRAILER OPERATING"

MAX SPEED 30m/min ON 0% SLOPE
SUPERABLE MAX SLOPE 2%
COLOR YWLOW RAL 1016 AND GREY RAL7016
DEAD LOAD ~2.700kg



INNER TRANSPORTATION TECHNOLOGY

L.go Dora Colletta 85/A
10153 Torino (Italy)
Tel. 011/2480569 - Fax 850085

e-mail: info@morellogiovanni.it
<http://www.morellogiovanni.it>

PROJECT:

SGAE +-90° R 20/2

PAYLOAD 20t

DESCRIPTION:

GENERAL ASSEMBLY DRAWING

CUSTOMER		ORDER	OFFER REFERENCE
DRW BY: A.Pesce		2769	
DATE: 25/02/2026		2769_A0A_AA000	
CHK BY:		SCALE: 1:17	ITEM NUMBER