
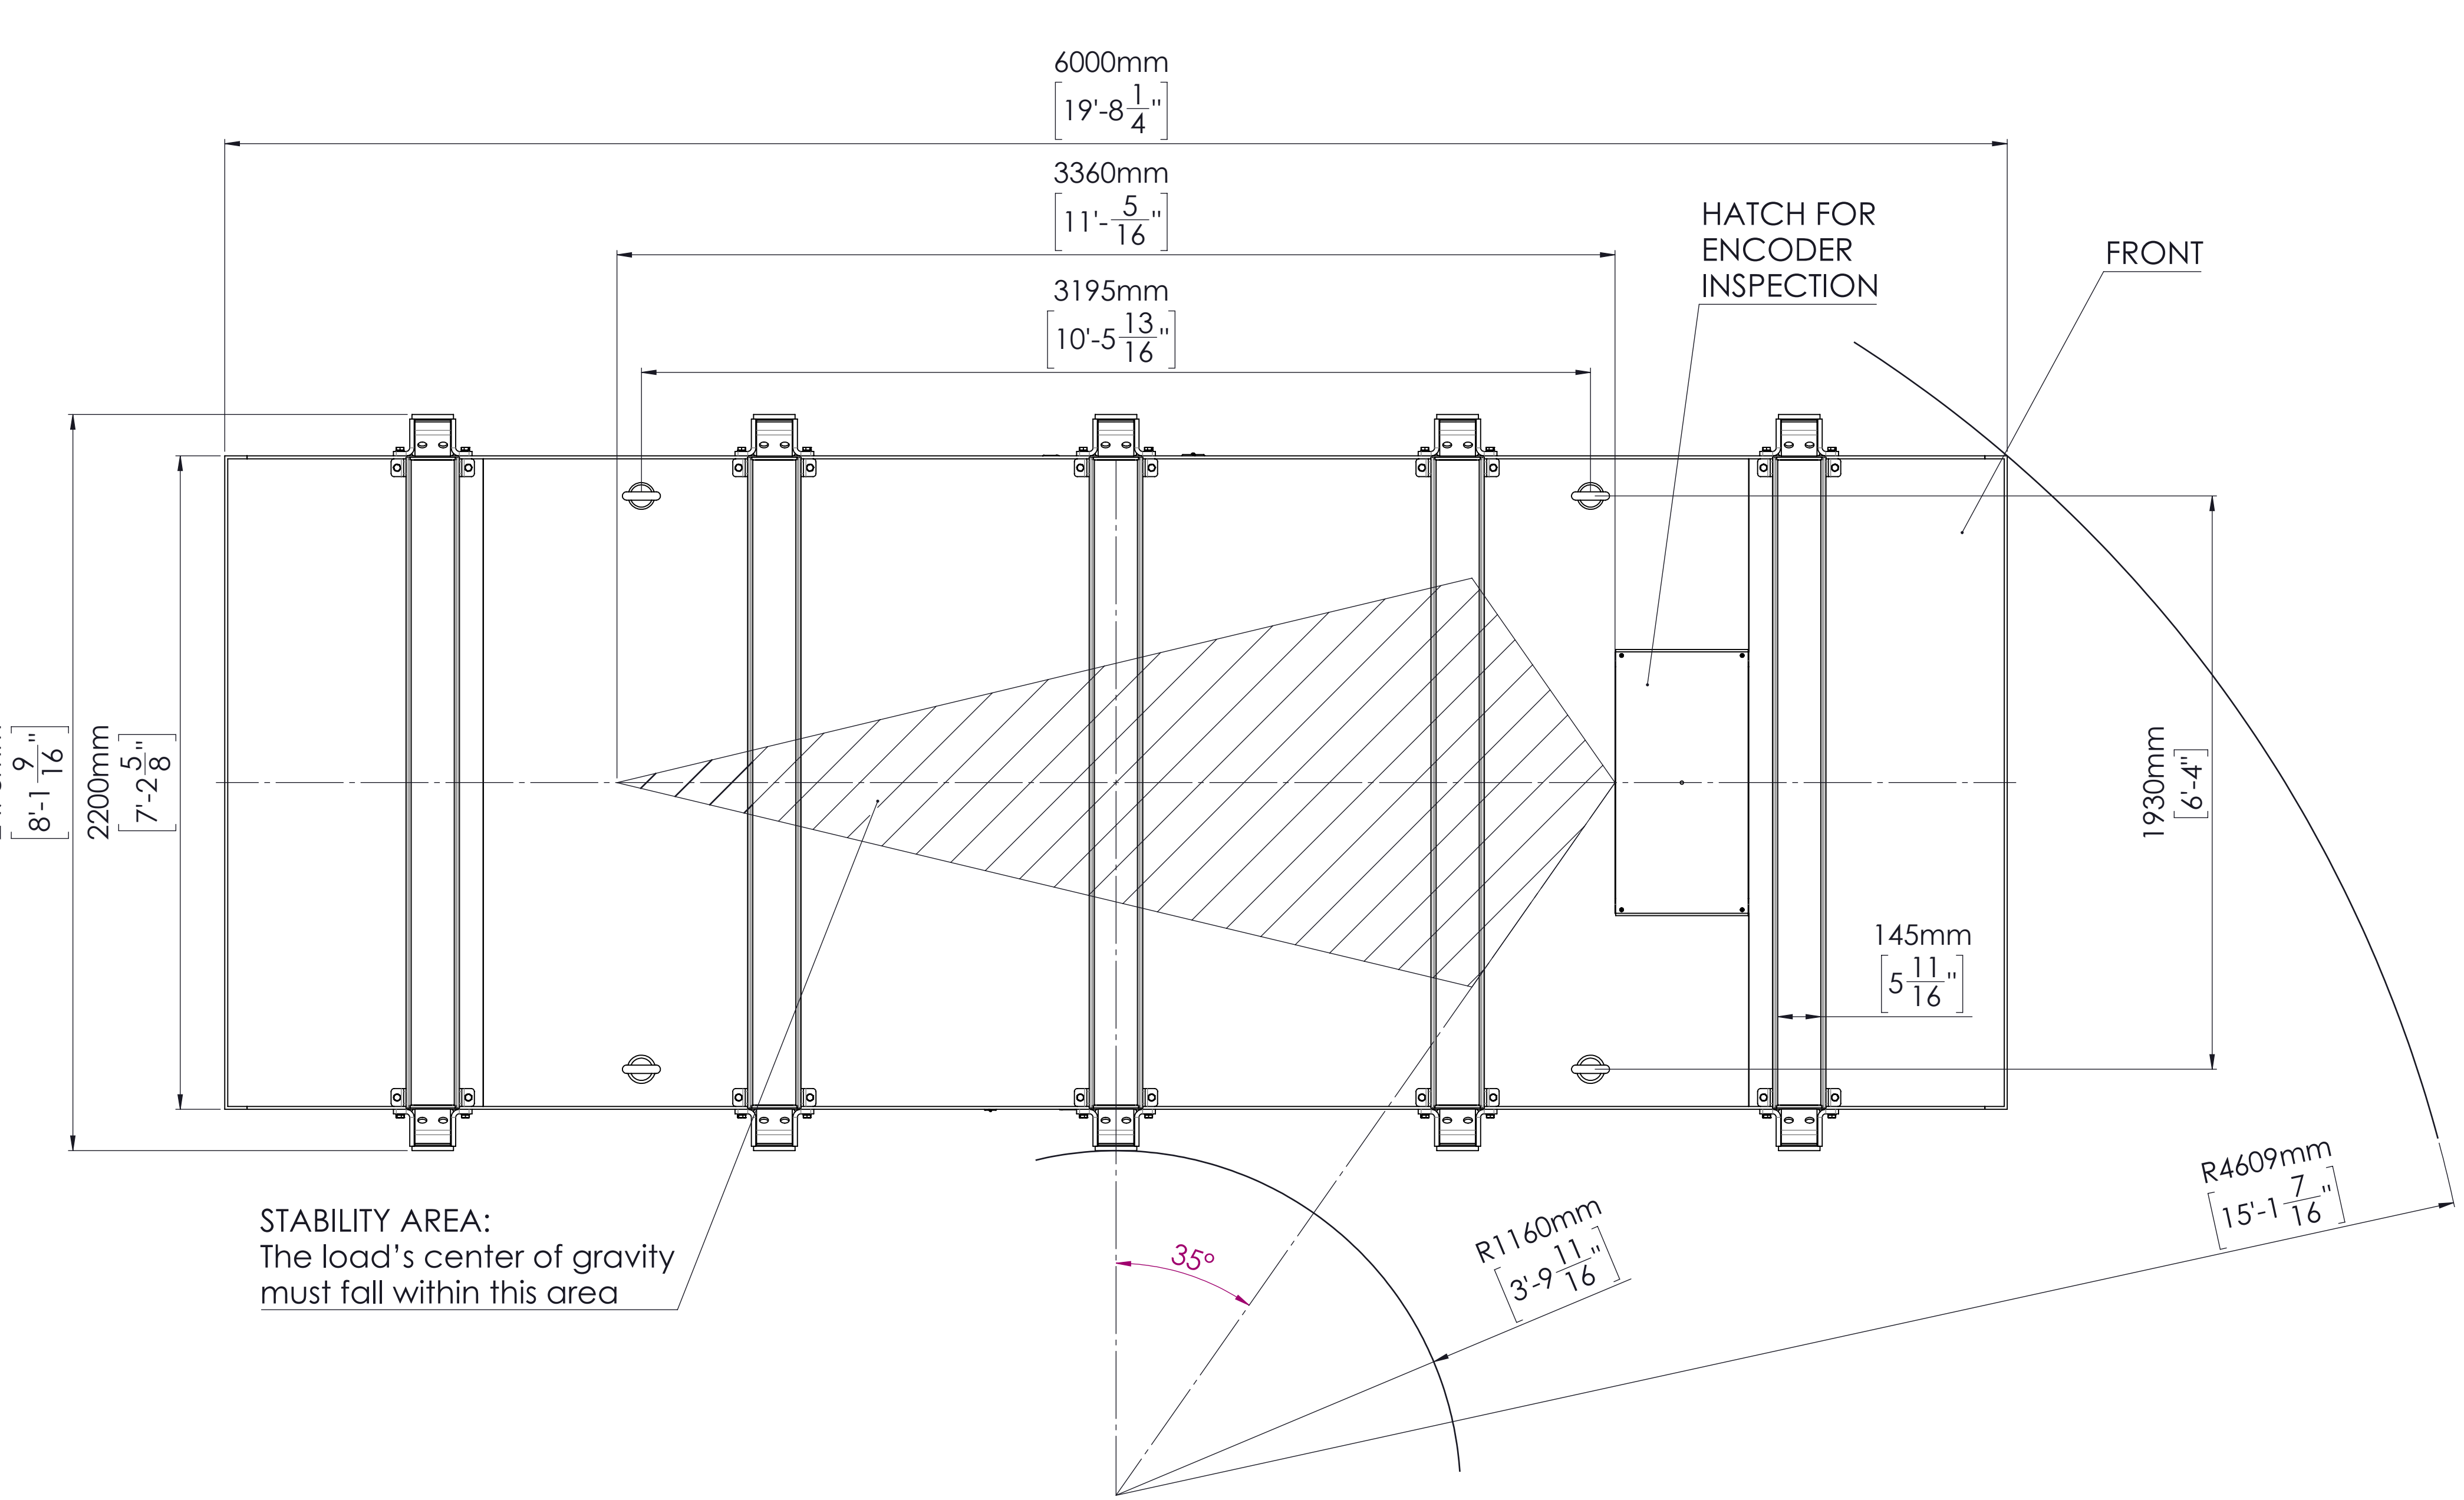
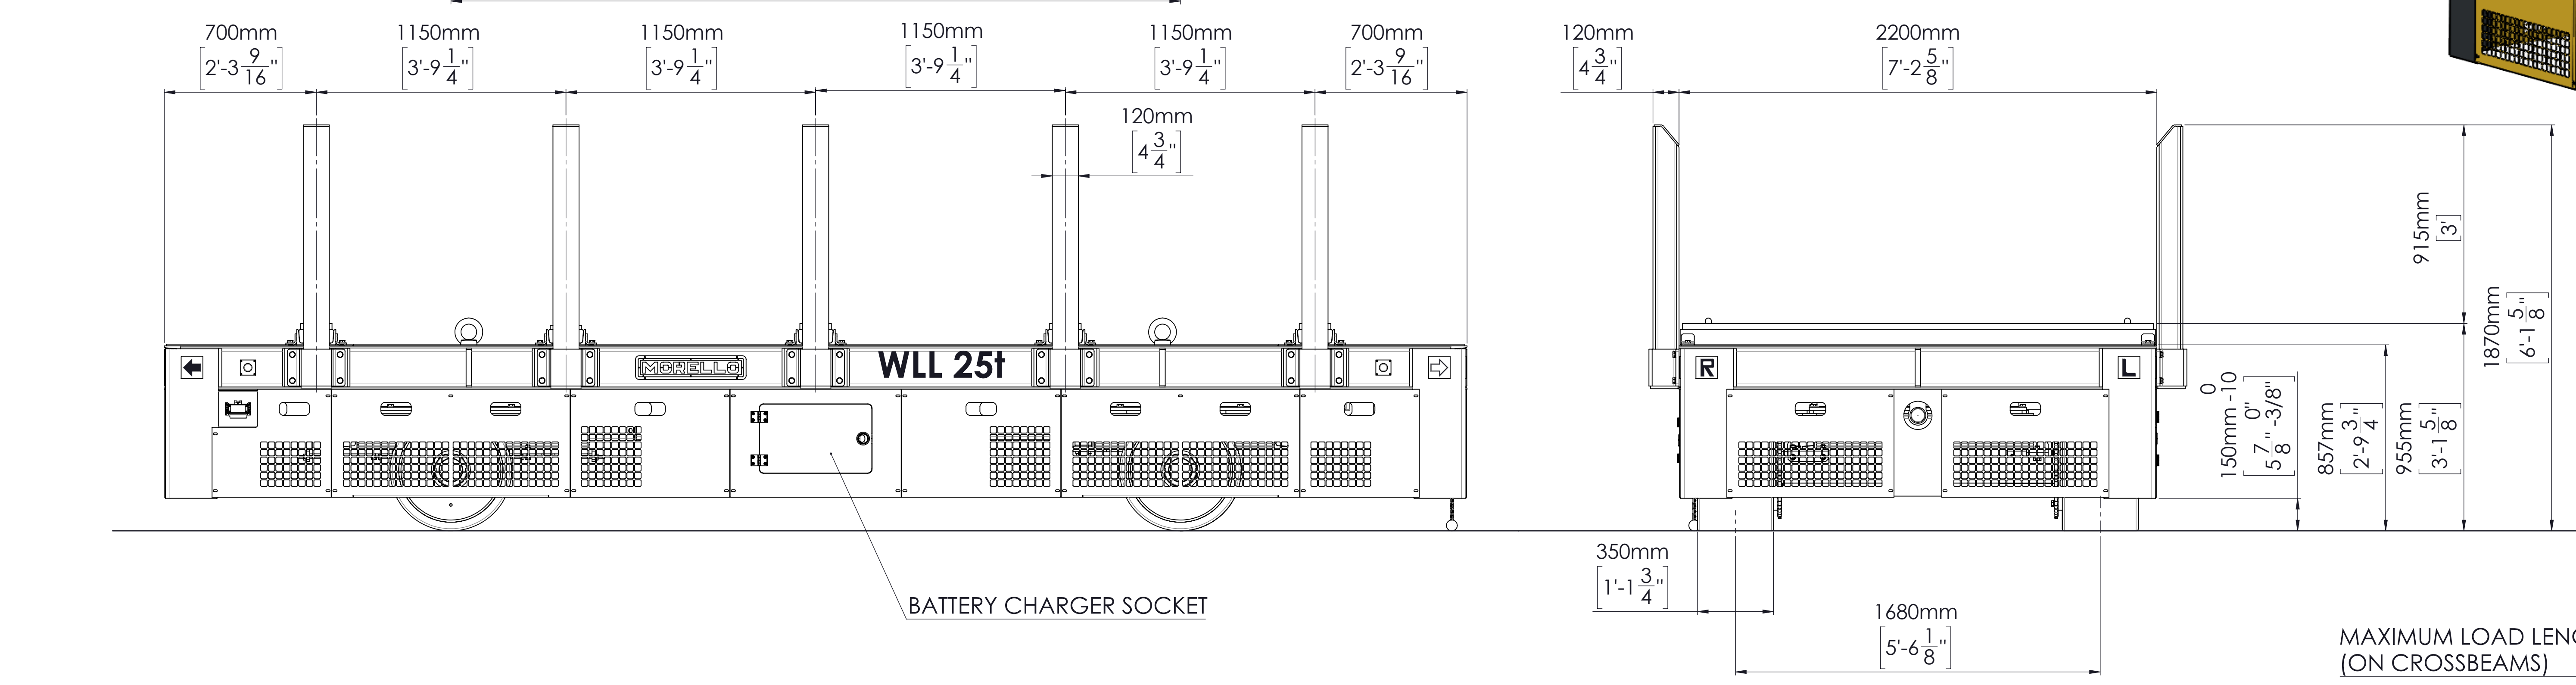
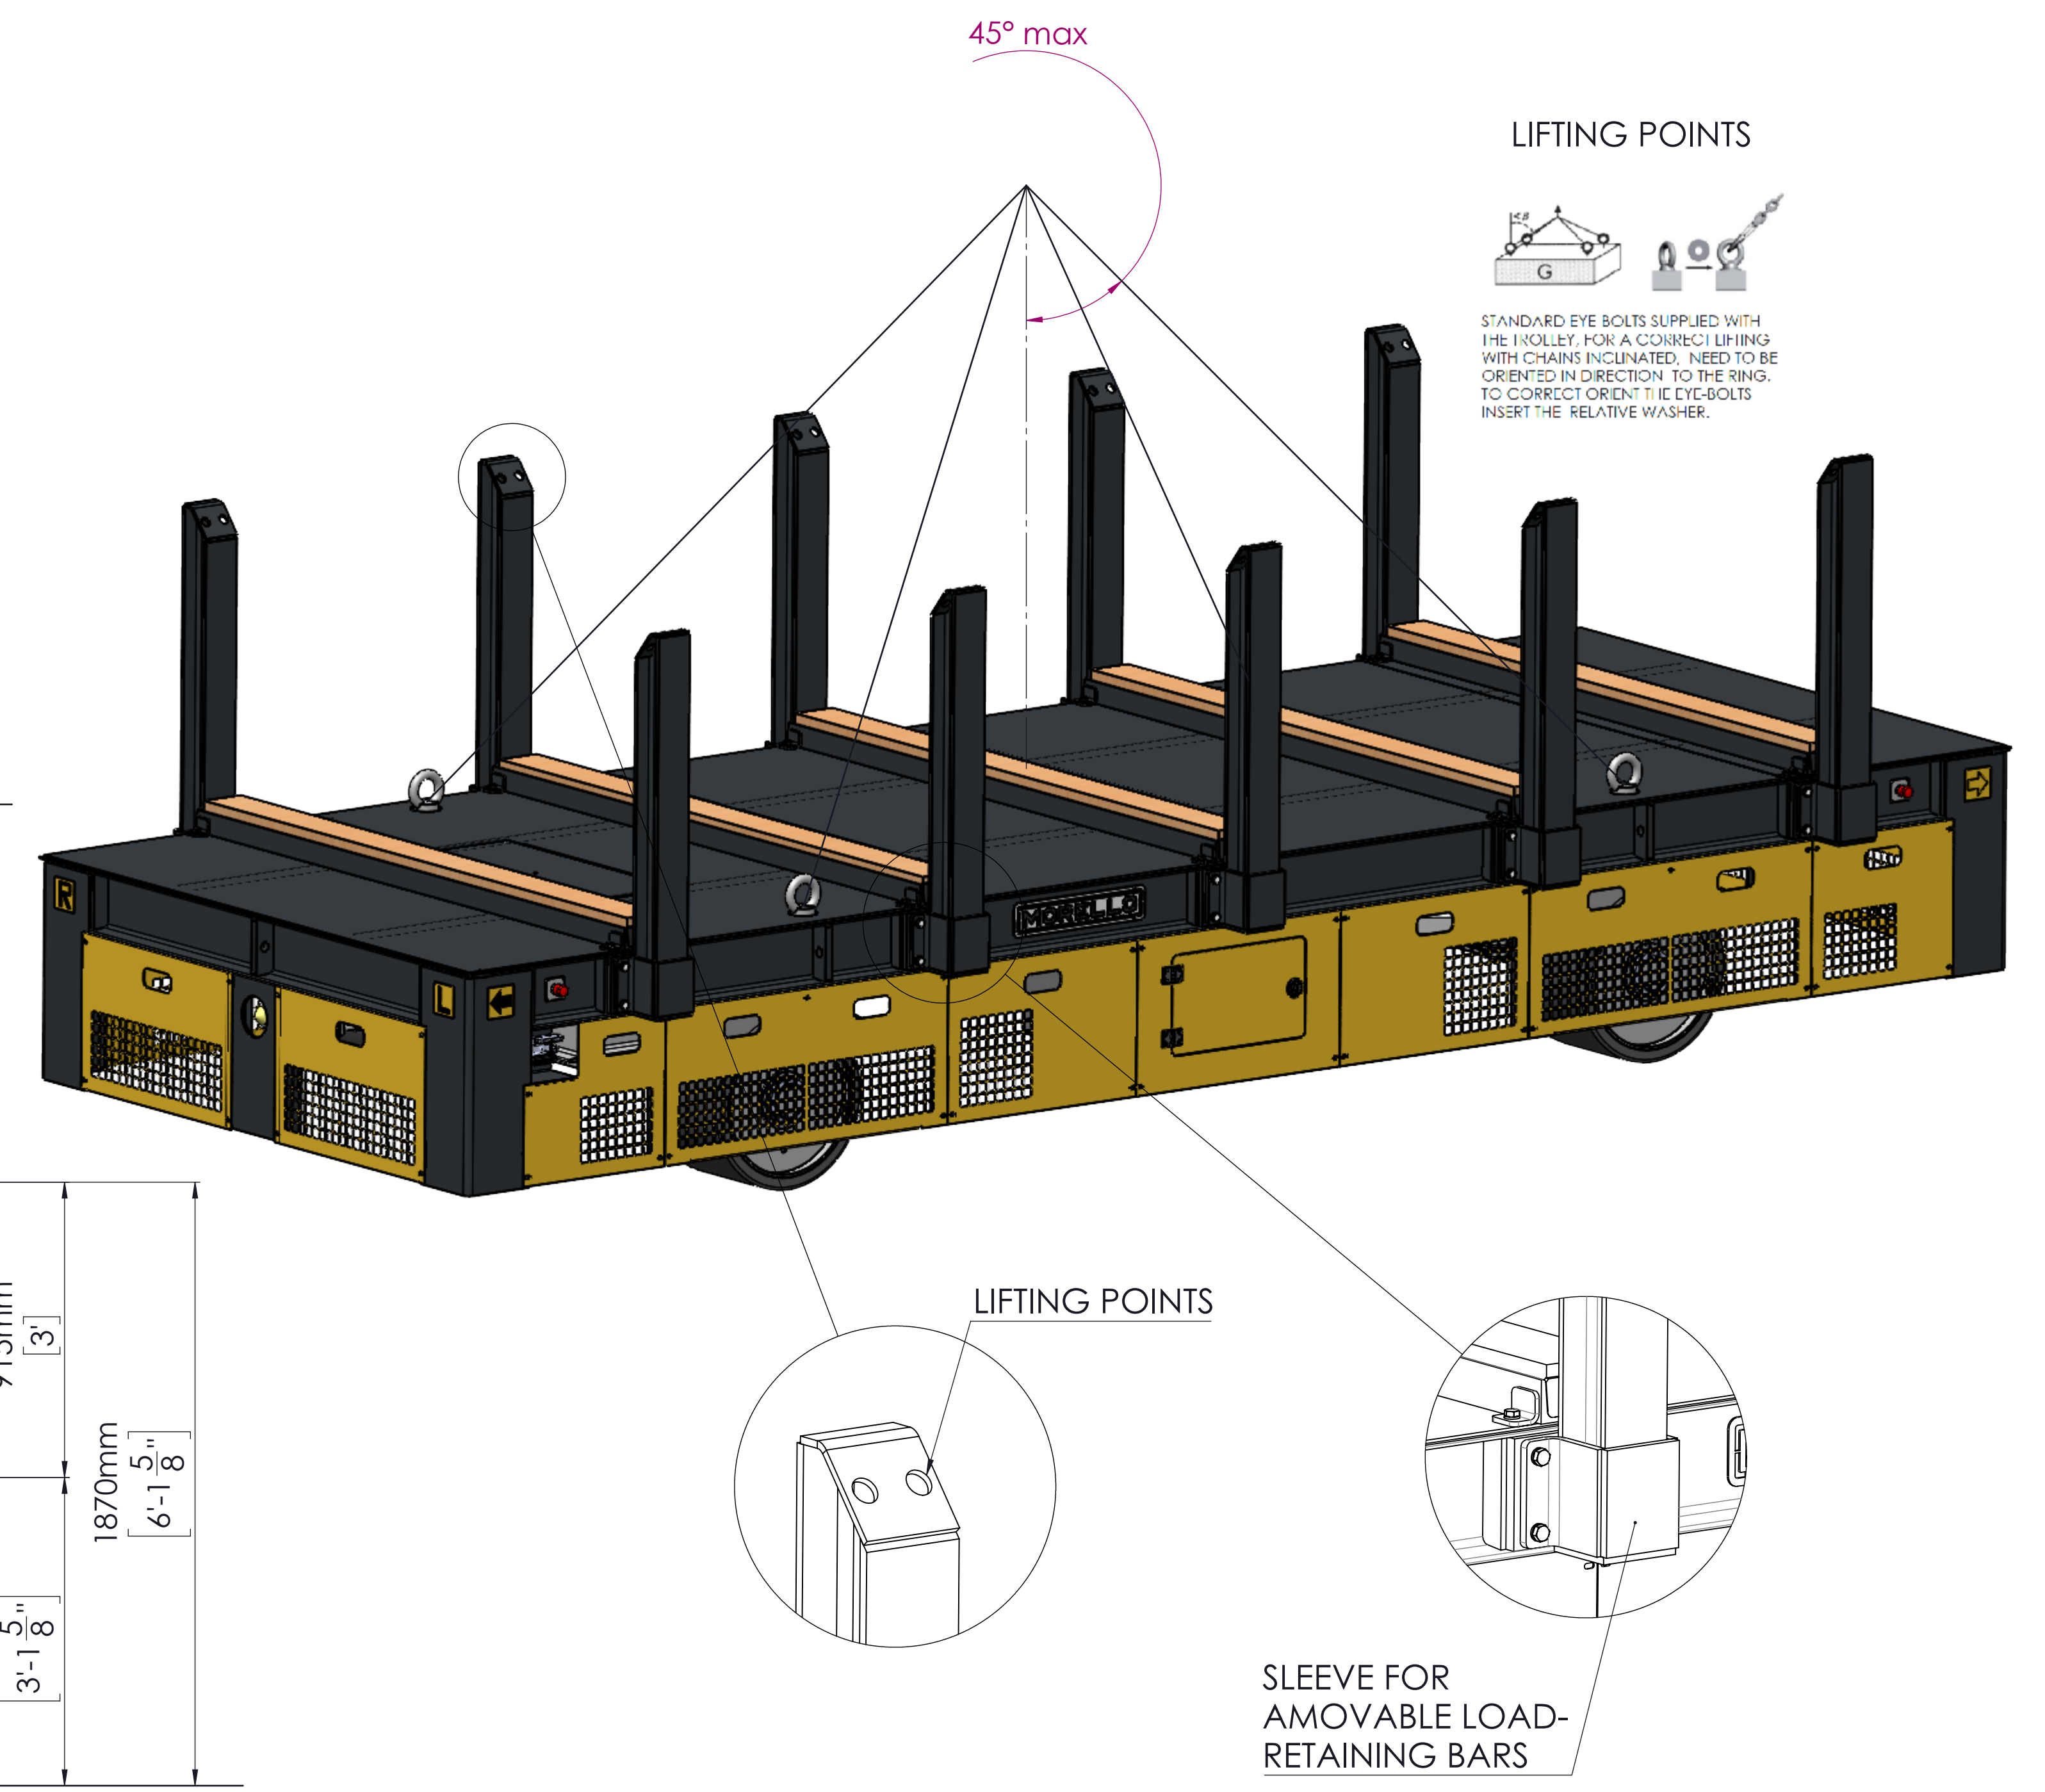


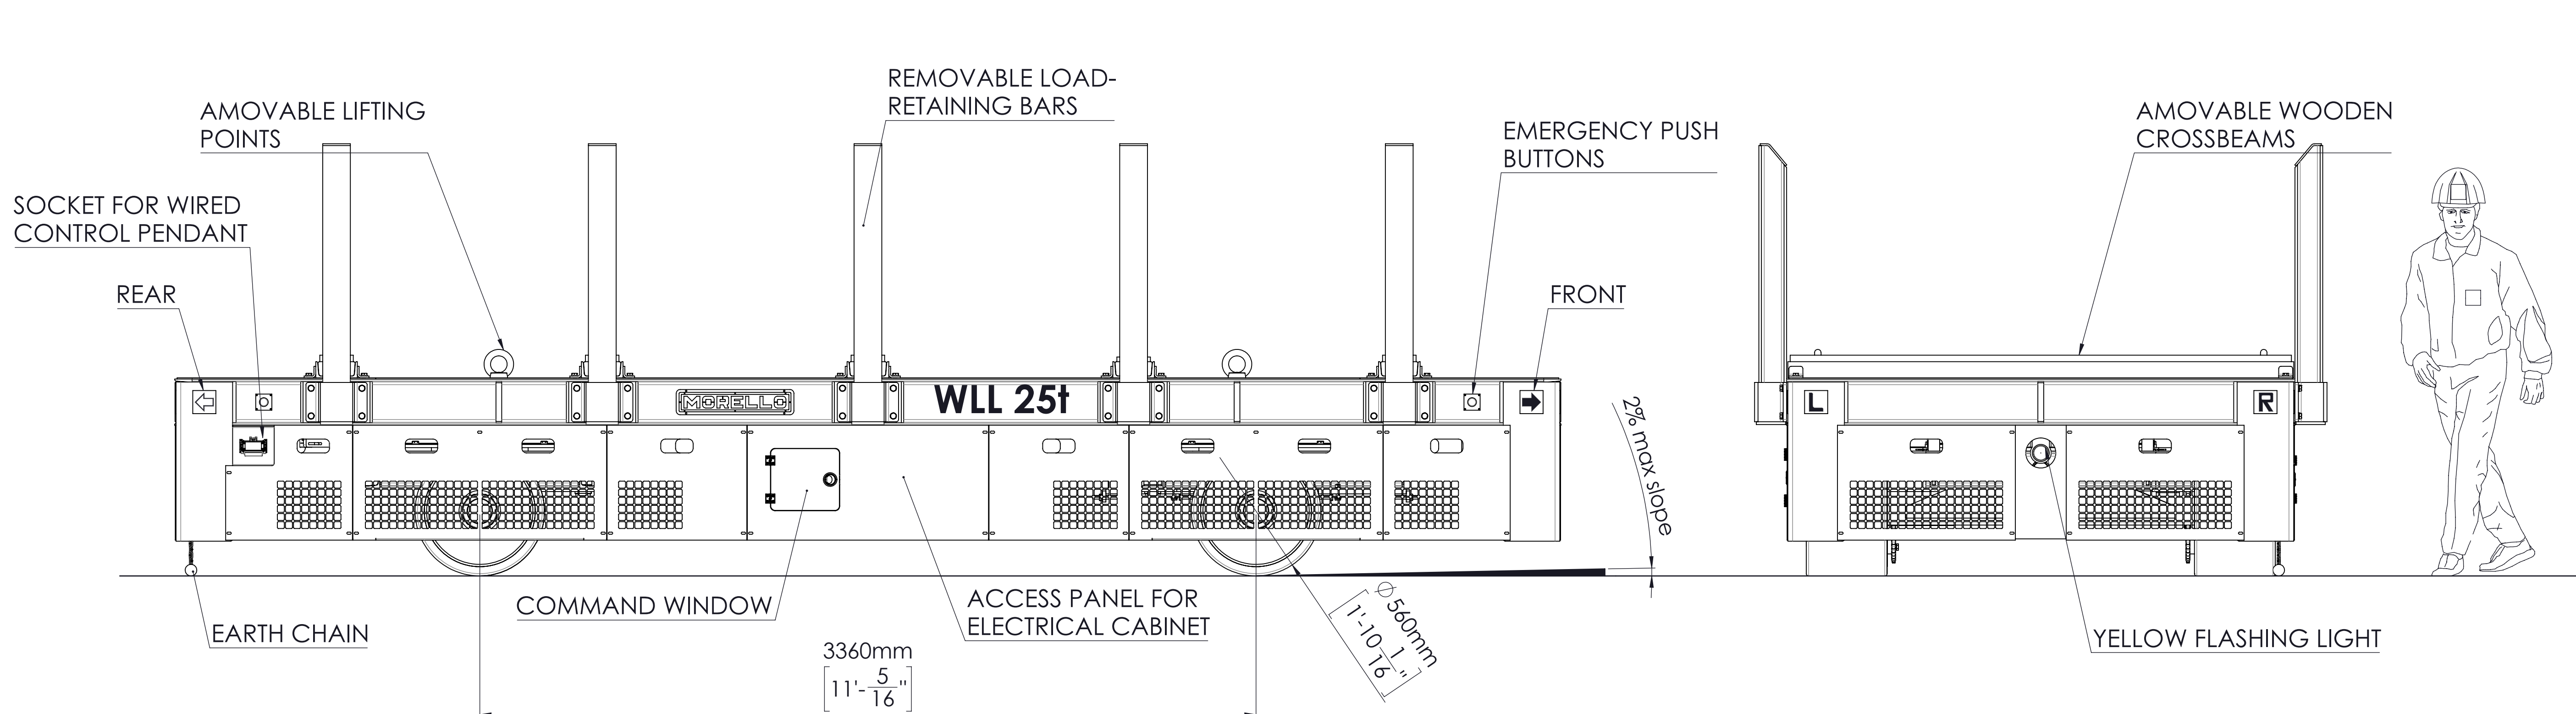

- CHARACTERISTICS**
- LOADING DECK DIMENSIONS: 6.000x2.200 mm [236,22x86,6 in] *
 - LOADING DECK HEIGHT: 955 mm [37,6 in] *
 - PAYLOAD: 25.000 kg [55,116 lb]
 - LOAD TYPE: profiles, max. length 12,2 m [40 feet]
 - MAX SPEED: 30 m/min on 0% slope
 - MAX SLOPE: 2%
 - DEAD LOAD: 5.300 kg [11,685 lb]
 - PAINTING: yellow RAL1018 and gray RAL7016

(*) Measured on wooden crossbeams

- MAIN MECHANICAL COMPONENTS**
- N. 4 RUBBER WHEELS Ø560x350 mm [22x13,78 in]
 - N. 4 AC MOTORS 80V 5.000W 2.200rpm
 - N. 10 LOAD-RETAINING BARS
 - N. 5 WOODEN CROSSBEAMS
 - N. 4 LIFTING EYEBOLTS

- MAIN ELECTRICAL COMPONENTS**
- N. 1 LITHIUM BATTERY 80V 220Ah
 - N. 1 BATTERY CHARGER 460V 60Hz 3ph
 - N. 4 MULTICOLOR FLASHING LIGHT
 - N. 4 EMERGENCY PUSH BUTTONS
 - N. 1 REMOTE CONTROLLER
 - N. 1 WIRED CONTROL PENDANT



MATERIAL HANDLING TECHNOLOGY SINCE 1946

Lgo Dora Colletta 85/A
10153 Torino (Italy)
Tel. 011/2480569 - Fax 850085

e-mail: info@morellogiovanni.it
http://www.morellogiovanni.it

PROJECT: **SGAE VC R 25/2**
Payload: 25t

DESCRIPTION: **GENERAL ASSEMBLY DRAWING**

CLIENT	ORDER	ORDER REFERENCE
D Semilla	2761	
DATE	17/12/2025	
SCALE	1:15	
ITEM NUMBER		2761_A0A_AA000

Dimensions in this drawing are indicative and may vary